

A/136 Tri-axial Piezo-Tronic IEPE Accelerometer

1mV/g up to 200mV/g $\pm 10\%$ 18gm Std 125 °C (HT 185 °C)



Triaxial vibration transducer comprising of three independent Konic Shear IEPE voltage output piezo-tronic accelerometers mounted orthogonally within a titanium block. Each sensor has a fully welded construction and each axis is calibrated individually in addition to the block calibration.


All the Microdot connectors are exiting in the same direction. Each insert is electrically insulated, individually from the housing, thus eliminating ground loop interference.

The multi sensor solution also offers the benefit of being repairable. If an insert is damaged it can usually be removed and replaced saving the cost of a new accelerometer.


The A/136 can be adhesive mounted or clip mounted.

A/36-1 Features M3 cut through holes for mounting.


A/136 Drawing

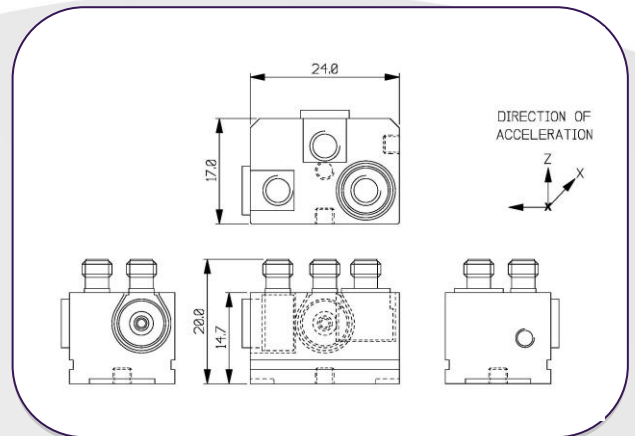

A/136-1 Drawing

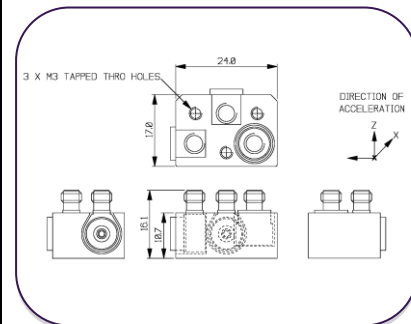

A/136-1 Cut through holes

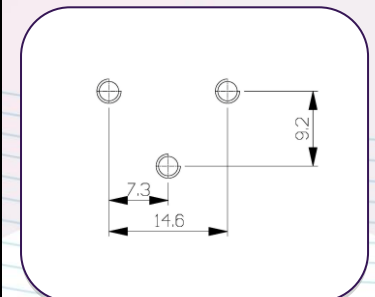

	Metric			Imperial		
Voltage Sensitivity $\pm 10\%$	1.02 mV/(m/s ²)	10.2 mV/(m/s ²)	20.4 mV/(m/s ²)	10mV/g	100mV/g	200mV/g
Supply Voltage VDC	15/35			15/35		
Supply Current mA	2/20			2/20		
Temperature Range	-50/ +125°C (+185°C HT)			-58/+257°F (+365°F HT)		
Voltage Sensitivity Deviation	-5% @ -50°C +5% @ +125°C $\pm 10\%$ @ +185°C			-5% @ -58 °F +5% @ +257°F $\pm 10\%$ @ +365 °F		
Max Continuous accn.g sine	9,806m/s ²			1000g		
Bias Voltage V DC	8/10			8/10		
Case Material	Titanium Grade 2			Titanium Grade 2		
Mounting	Adhesive/ 3x M3 Tapped Holes/Clip			Adhesive/ 3x M3 Tapped Holes/Clip		
Weight	18g			0.64oz		
Case Seal	Welded			Welded		
Connector	3 x 10-32 UNF Microdot			3 x 10-32 UNF Microdot		
Resonant Frequency kHz	Z Axis - ≈ 21 X/Y Axis- ≈ 15			Z Axis - ≈ 21 X/Y Axis- ≈ 15		
Frequency Response	X/Y Axis 1Hz – 5kHz $\pm 5\%$ Z Axis 1Hz – 9kHz $\pm 5\%$			X/Y Axis 1Hz – 5kHz $\pm 5\%$ Z Axis 1Hz – 9kHz $\pm 5\%$		
Saturation Limit	4,903m/s ²	490.3m/s ²	245.2m/s ²	500g	50g	25g
Cross Axis Error % max	5			5		
Setting time to 90% final val. secs	<1 sec			<1 sec		
Size	24 x 17 x 14.7mm			0.95 x 0.66 x 0.58in		

DJB Instruments (UK) Ltd

Finchley Avenue,
Mildenhall, Suffolk IP28 7BG

A UK company with UK-based manufacturing, assembly and calibration in-house.

Tel +44 (0)1638 712 288
Email sales@djbinstruments.com
Web www.djbinstruments.com

DJB Iss.1






A/136 Tri-axial Piezo-Tronic IEPE Accelerometer

1mV/g up to 200mV/g $\pm 10\%$ 18gm Std 125 °C (HT 185 °C)

Typical Frequency Response

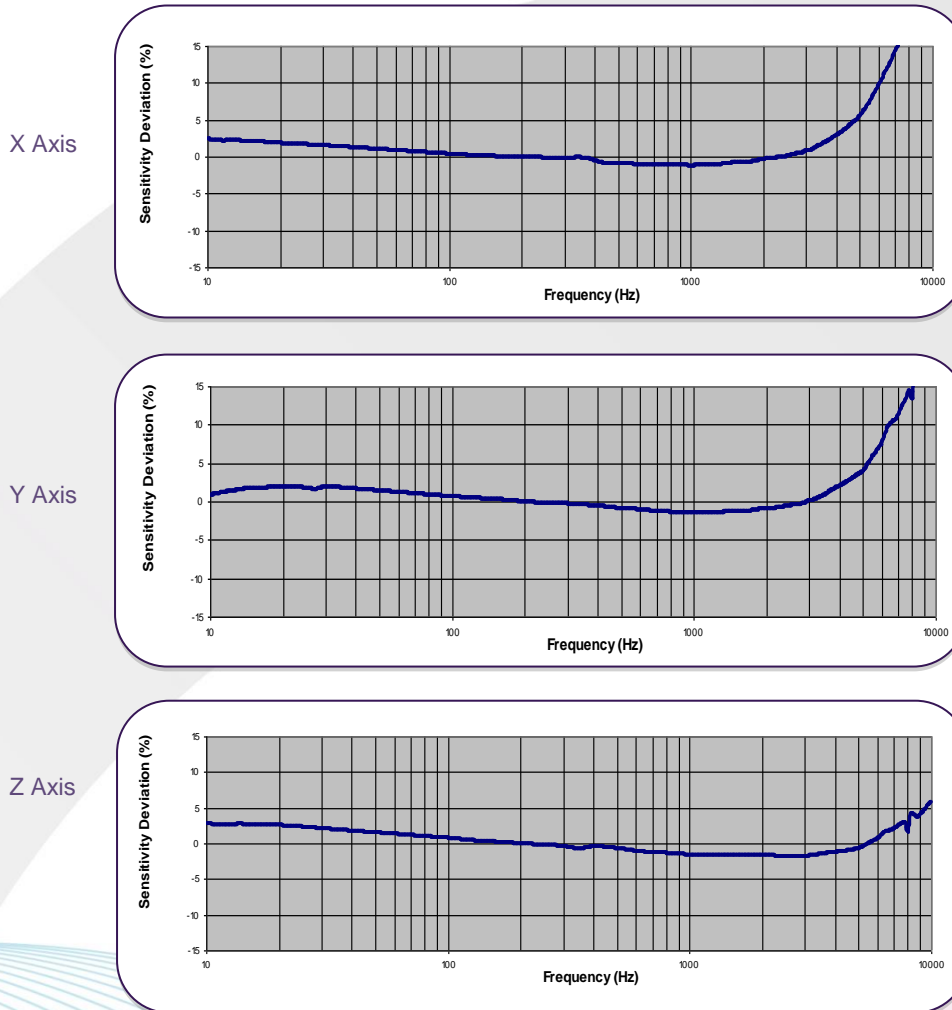

Temperature Response

Spectral Noise

- 1Hz – 113 μ g/ \sqrt Hz
- 10Hz – 29 μ g/ \sqrt Hz
- 100Hz – 16 μ g/ \sqrt Hz
- 1kHz – 6 μ g/ \sqrt Hz

